



Tensioning the drive belt

Losen the bolts for the saw motor (qty. 2)
Marked with green arrows.

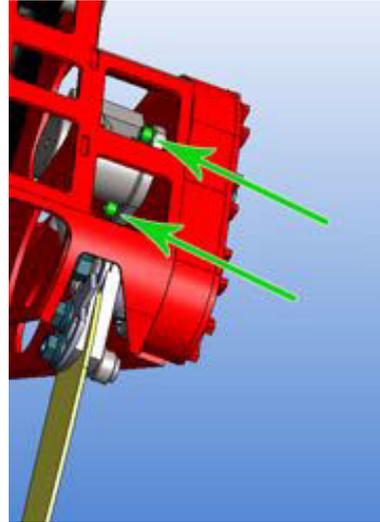

Tension the belt by tightening the
indicated nut just inside the saw
cassette.

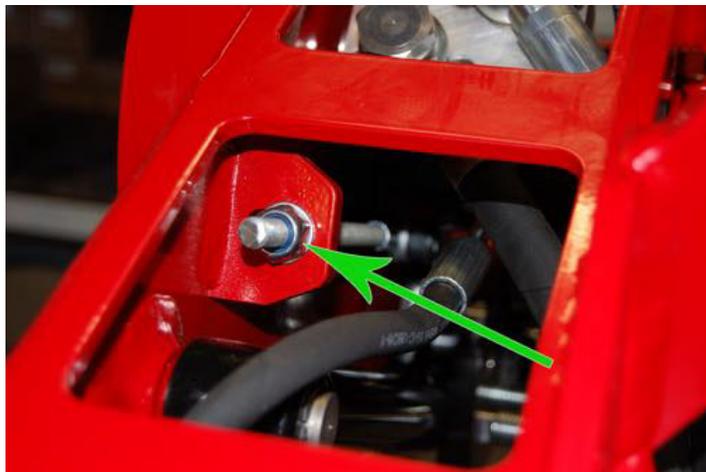


Check that the tension is correct.
Se next page.

Check tension of the belt after tensioning or replacement

Exampel:

The belt should be possible to move about ca 5 mm (1/4") in both directions (total 1/2") when you try moving it quite firmly.

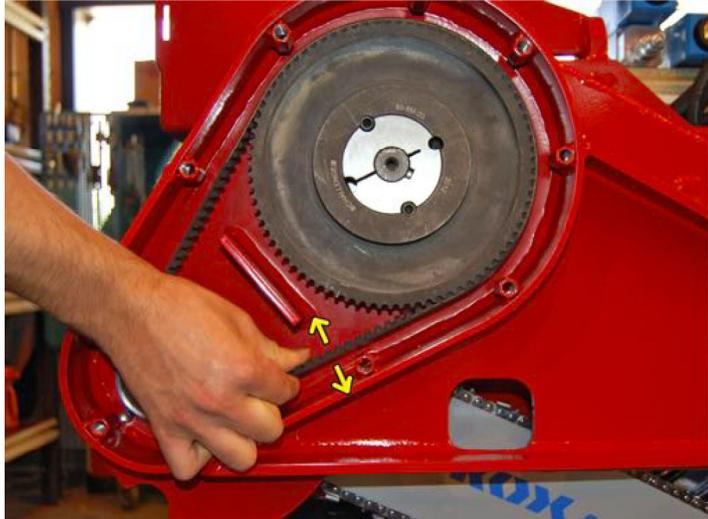

Another way to check the tension is to try to turn the belt 90°. This should be possible but only with a very firm hand.



You should also be able to turn the bigger belt wheel (may be very heavy when the chain is tight).

